


# Product Specifications

## Simplex Cable ( GJFJV/H )

### Standard

Reference with standard YDff 1258.2-2003,  
ICEA-596, GR-409, IEC60794-2-10/11, etc;

Meet the requirements of UL approval for OFNR  
and OFNP

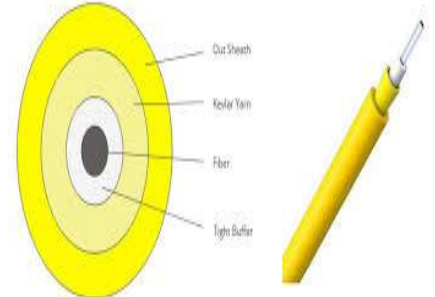

### Application

- Trunking lines direct to telecommunications closet
- Fiber patch panels within communications closets
- Long haul networks
- Links between electronic equipment and fiber patch panels
- Connectorized patch cords for cross connect applications

### Specification

- 1.6 mm to 2.9 mm outside diameter available
- Easy strip option available
- Custom diameters, colors, and print legends

### Temperature Specifications

	PLENUM	RISER	LSZH
OPERATION	0° C to +70° C	-20° C to +70° C	0° C to +70° C
STORAGE	-40° C to +75° C	-40° C to +75° C	-40° C to +75° C
INSTALLATION	0° C to +70° C	-20° C to +70° C	0° C to +70° C



# Product Specifications

## Technical parameters

---

Cable Code	Cable Diameter mm	Cable Weight kg/km	Diameter um	Tensile Strength Long/short term N	Crush Resistance Long/short term N/100mm	Bending Radius Dynamic/Static mm
GJFJV(H)	$\text{Ø}2.0 \pm 0.2$	3.0	4.0	$900 \pm 50$	100/500	50/30
	$\text{Ø}3.0 \pm 0.2$	6.0	7.5	$900 \pm 50$	100/500	50/30