


2 cores unshielded alarm cable



Standard

- IEC60502
- BS 6346
- GB 9330

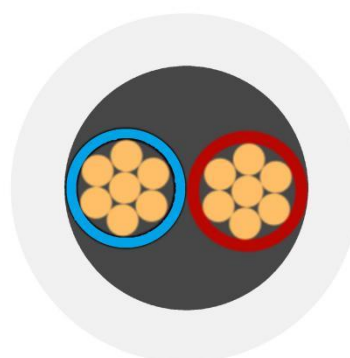

Application

- Building intercom system
- Appliances inside
- Automation equipment
- Instrumentation
- Electronic equipment

Specification

- | | | |
|-------------------|-----|------------------|
| ■ Inner Conductor | CU | 7* Φ 0.15mm |
| ■ Insulation | PVC | Φ 0.5mm |
| ■ Jacket | PVC | Φ 5.6mm |

Electrical Performance (20 °C)

- | | |
|-------------------------------|-----------------------------|
| ■ Impedance: 39 \pm 3 Ohm | ■ Sparker Test: 1000VAC |
| ■ Capacitance: 52 \pm 2pF/m | ■ Far-End Crosstalk: 150khz |

Thermal Characteristics

- | | |
|---|---|
| ■ For fixed installation: -35°C up to +70°C | ■ For mobile installation: -5°C up to +70°C |
|---|---|